


# CYCLE ON PLASTER BOARDS

AKRYLINE GG or GM or GF

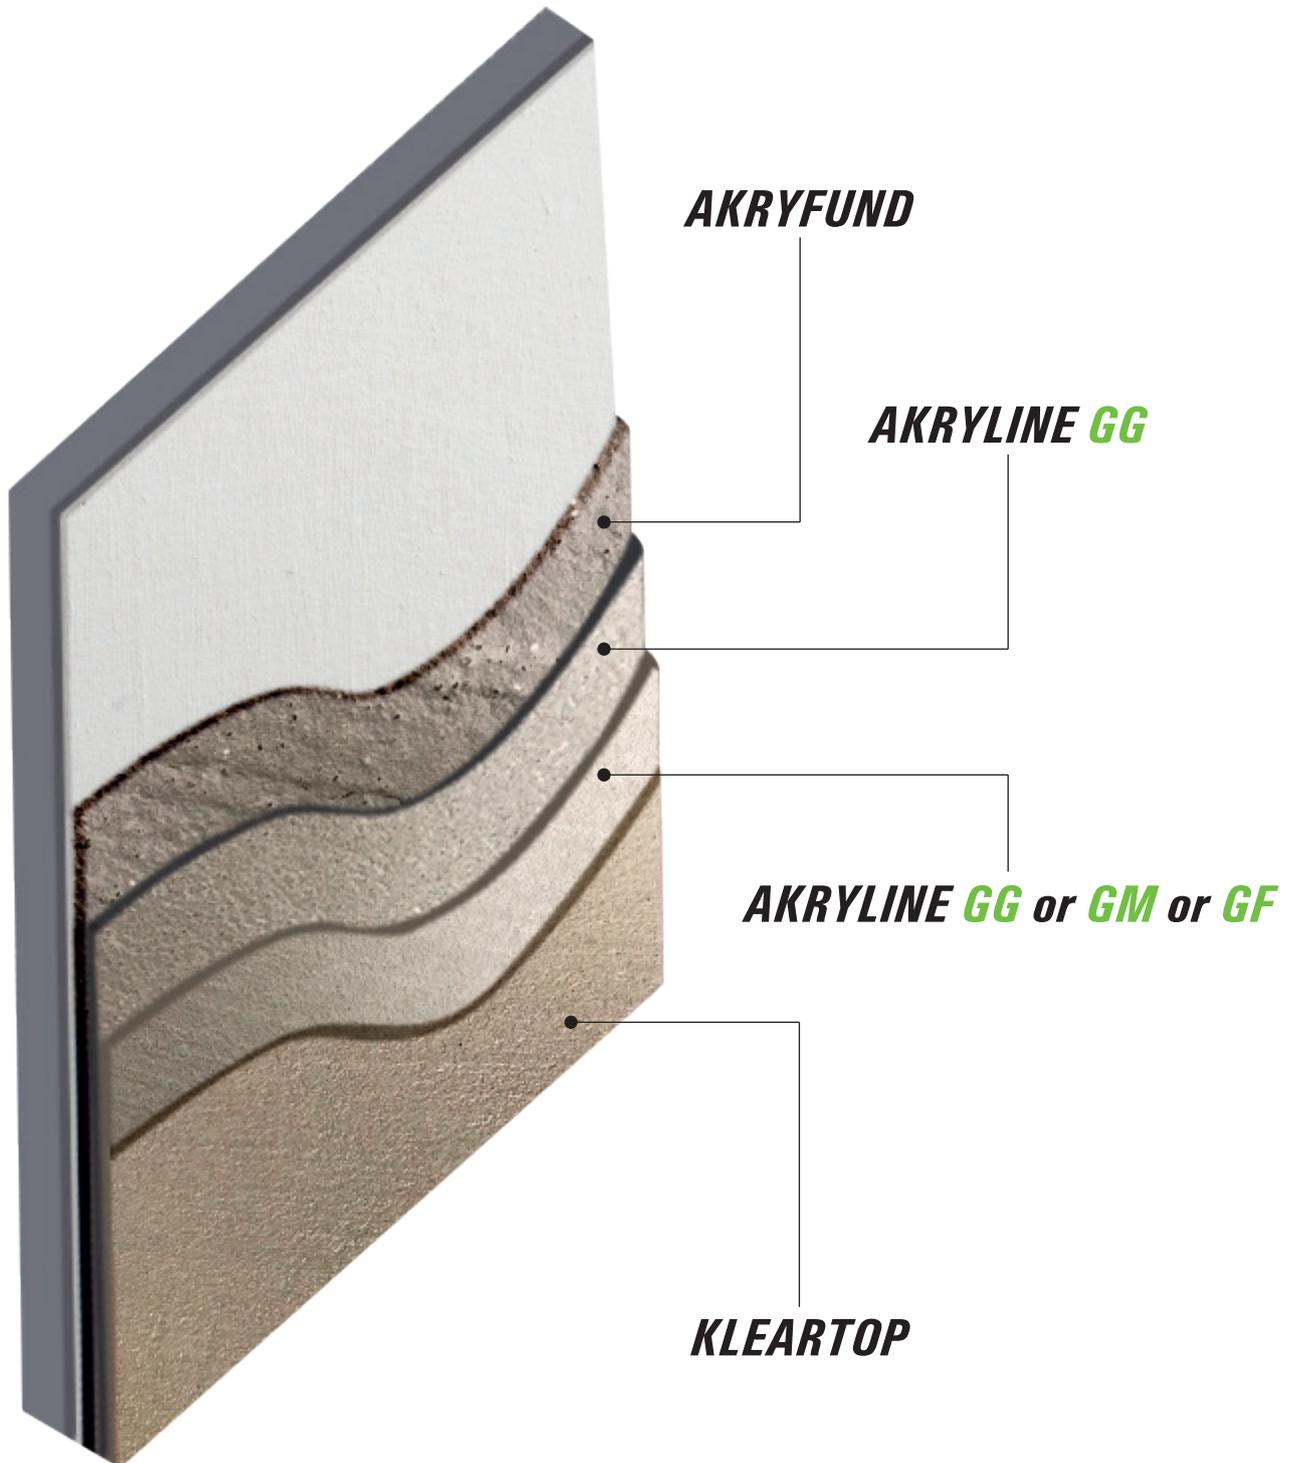

**AKRYLINE****DAY 1**

- Apply a coat of **AKRYFUND** by roller or by brush, distributing the product evenly and homogeneously on the surface. Allow to dry for 3-4 hours.
- Once completely dry, apply a coat of **AKRYLINE GG** (coarse grain) with either a metal or a plastic trowel, taking care to smooth off all excess product.

**AKRYLINE****DAY 2**

- Sand the surface with 40 grit sandpaper and then vacuum clean the dust.
- Check the evenness of the surface and apply a coat of **AKRYLINE GG** (coarse grain) with the use of a metal trowel taking care to level off all excess product.
- Allow to dry for 4 hours. When completely dry, sand down the surface with 60-80 grit sandpaper and vacuum clean away the dust.
- Check the evenness of the surface and apply a coat of either **AKRYLINE GM** (medium grain) or **AKRYLINE GF** (fine grain) with the use of a metal trowel taking care to level off all excess product.
- Allow to dry for 4 hours. When completely dry, sand down the surface with 80-120 grit sandpaper and vacuum clean away the dust.
- Check the evenness of the surface and apply a second coat of either **AKRYLINE GM** or **AKRYLINE GF** taking care to level off all excess product. Allow to dry for 4 hours.

**AKRYLINE****DAY 3**

- Sand down the surface with 80-150 grit sandpaper and vacuum clean away the dust.
- Add all the required quantity of **CATALFIN** to the **KLEARTOP** product while stirring with a mechanical mixer. Continue mixing until the two components are perfectly emulsified. Manual mixing alone may not be sufficient to achieve perfect blending of the two components.
- The catalysis ratio is calculated by weight and not by volume, so if the entire package will not be used, weigh exact quantities with an electronic scale.  
**Catalysis ratio: KLEARTOP 100 + CATALFIN 20.**
- Apply the first coat of **KLEARTOP** with a short pile roller, by brush or by airless spraying equipment and allow to dry for 3 hours.
- Apply the second coat of **KLEARTOP** by short pile roller, brush or airless spraying and allow to dry for another 3 hours.
- For the **KLEARTOP 100** high gloss version, a third coat can be applied to increase the gloss of the surface.
- **Important:** in case more than 24 hours pass between coats, it will be necessary to sand the surface with 320 grit sandpaper.

**NB:** for applications on surfaces where greater resistance is required, it is suggested to repeat the operations of **DAY 2**.